

Flexible Flat Cable Products Type

Type	Top View	Side View
T1		
F1		
D1		
H0		
H2		
T3		
F3		
D3		
D4		

Type	Top View	Side View
T2		
F2		
D2		
H1		
Special Type		
Various can be produced according to the customer requirements.		


Selection Guide For Connectors

Unit:mm

Pitch	0.5	0.8	1.0	1.25	1.5	2.0	2.54
thickness*width	0.035*0.3 0.05*0.3 0.1*0.3	0.35*0.5 0.05*0.5 0.1*0.5	0.035*0.65 0.05*0.65 0.05*0.6 0.1*0.65	0.035*0.8 0.05*0.8 0.1*0.8	0.035*0.3 0.05*0.3 0.1*0.3	0.035*0.65 0.05*0.65 0.05*0.6 0.1*0.65	0.05*1.27 0.1*1.27
	More options available(PWM)						

UL style & PET

UL Style	20798	2896	20624	20941
Heat resistant	80°C	80°C	80°C	105°C
Voltage withstand	60V	30v	60v	90v
PET thickness	0.043mm ; 0.06mm 0.080mm ; 0.10mm	0.043mm	0.06mm 0.08mm	0.06mm

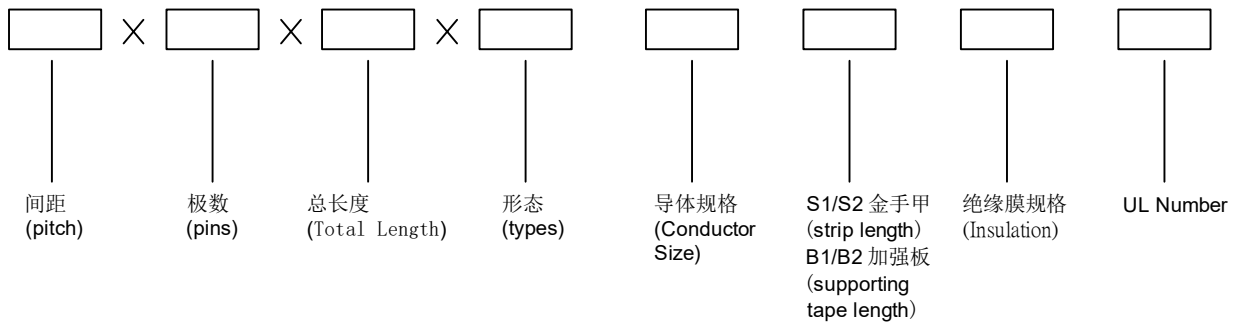

EXAMPLE: 1.0*28*500*T1 (0.05*0.65) (4/4/8/8) (0.06*2) UL20624